

PHILIPS

Professional lighting



India Trade Catalogue

Professional Lighting

2023 - 24

Philips LED lighting

Leading the market today,
transforming the future.

Philips has been designing, developing and manufacturing LED lighting products resulting in a far-reaching intellectual property portfolio and more than 20,000 time-tested installations. We have strengthened our leadership position and revenue generation in the LED Lighting market with solutions across segments, offices, retails, industries and public. We are leaders in technology and product performance in the LED lighting industry and are a confident choice of lighting specifiers across the globe.



Content

03 - 33

Indoor Professional Trade Luminaires

34 - 42

Outdoor Professional Trade Luminaires

43 - 46

City Beautification Range

47 - 57

Professional Lamps

58 - 69

Solar Range

Indoor Professional Trade Luminaires



Troffer






FullGlow Essential

Model Number	Wattage	Lumen	MRP (₹)
RC360B LED30S-4000 V2 L60W60 PSU OD	30 W	3000	3200/-
RC360B LED36S-4000 V2 L60W60 PSU OD	36 W	3600	3500/-

HSN Code: 94051090




Long life:
25,000 burning hrs



Housing:
CRCA



Energy efficient:
>100 lumens/watt



Unique slim design:
Super slim with just
35mm depth inside ceiling



Mounting:
Provision for clip mounting slot

Colors available:






Full Glow essential 1x1

Model Number	Wattage	Lumen	MRP (₹)
RC360B LED20S-4000/6500 L30W30 PSU OD	20W	2000	2500
RC360B LED25S-4000/6500 L30W30 PSU OD	25W	2500	2700

HSN Code: 94051090

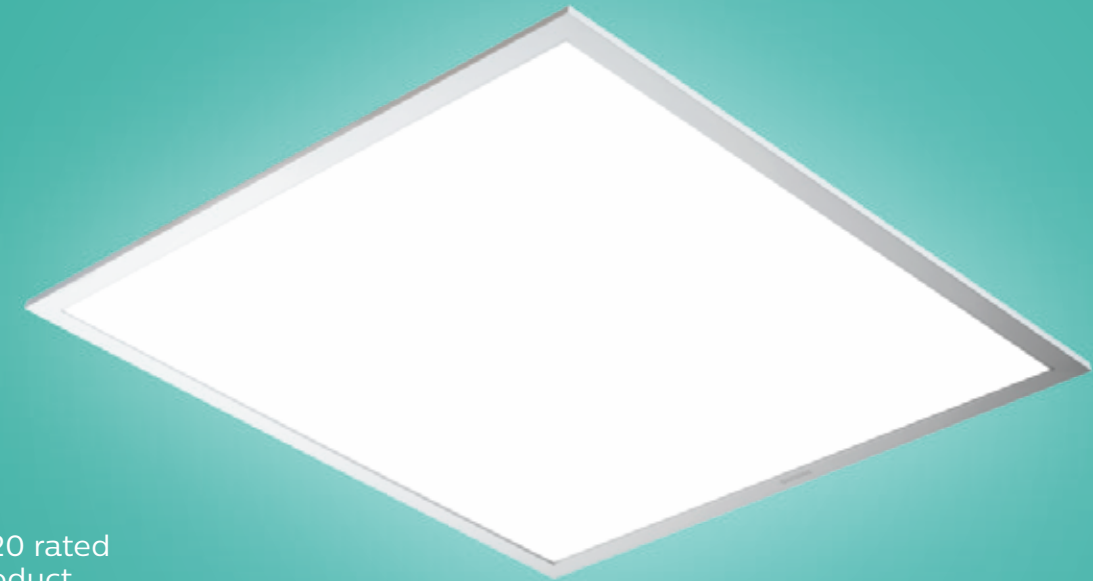

IP20 rated product



2.5kv surge protection



Verstale use for industry, office & public applications



CRI > 80 & Powerfactor > .9



Efficacy: 100 lumens/watt



Prefixed clamps for false ceiling

Colors available:





Smart Bright Surface 300-1x1 surface

Model Number	Wattage	Lumen	MRP (₹)
SM360B LED20S-4000/6500 L30W30 PSU OD	20W	2000	2700
SM360B LED25S-4000/6500 L30W30 PSU OD	25W	2500	2800

HSN Code: 94051090



Surge 2.5v



IP 20 rating product



Efficacy: 100 lumens/watt



High CRI>80 and SDCM<5



Easy to install and maintain



Operating temperature- 0 to 45 degree Celsius

Colors available:

NW

CW



Smart Bright Linear Gen 2

Model Number	Wattage	Lumen	MRP (₹)
SP170P LED25S-4000/6500 PSU W5L113 OD WH	25	2500	8000/-
SP170P LED50S-4000/6500 PSU W5L226 OD WH	50	5000	14000/-
SP170 W50 AC JB (Joining Accessories)			550/-

HSN Code: 85395000



Extruded aluminum housing



Available in both stand alone and continuous version



Available in 4 feet and 8 feet



Suspension Included

Colors available:



Spotlight





Sky COB Tilttable

Model Number	Wattage	Lumen	MRP (₹)
7W Sky COB Tilt LED Spotlight CW / NW / WW	7 W	560	1500/-
12W Sky COB Tilt LED Spotlight CW / NW / WW	12 W	960	2000/-
18W Sky COB Tilt LED Spotlight CW / NW / WW	18 W	1440	3000/-
22W Sky COB Tilt LED Spotlight CW / NW / WW	22W	1760	4000/-

HSN Code: 94051090



Long life:
25,000 burning hours



Housing:
Metal housing for better heat dissipation



Voltage protection:
160V-360V with surge protection of 2.5KV



Smart engineering:
Tilttable spotlight with decorative finish

Colors available:





Smart Bright Accent Adjustable

Model Number	Wattage	Lumen	MRP (₹)
RS262B LED6S PSU (CW/NW/WW)	6W	600	1650/-
RS262B LED10S PSU (CW/NW/WW)	10W	1000	2020/-
RS262B LED15S PSU (CW/NW/WW)	15W	1500	3540/-
RS262B LED20S PSU (CW/NW/WW)	20W	2000	4100/-
RS262B LED30S PSU (CW/NW/WW)	30W	3000	4630/-

HSN Code: 94051090



4kv surge protection



CRI > 80



Wide Operating Temp:
10 degrees to 45 degrees



360° beam angle
ideal for accent
lighting



Available in
6W to 30W

Colors available:





Smart Bright Accent Wall washer

Model Number	Wattage	Lumen	MRP (₹)
RS263B LED8S PSU (CW/NW/WW)	8	800	2020/-
RS263B LED15S PSU (CW/NW/WW)	15	1500	3030/-
RS263B LED20S PSU (CW/NW/WW)	20	2000	3920/-
RS263B LED36S PSU (CW/NW/WW)	36	3600	4900/-

HSN Code: 94051090



4kv surge protection



CRI > 80



Wide Operating Temp:
10 degrees to 45 degrees



360° beam angle
ideal for accent
lighting



Available in
8W to 36W

Colors available:





AccentSpot

Model Number	Wattage	Lumen	MRP (₹)
30W Accent Spot CW/NW/WW	30 W	2250	3995/-

HSN Code: 94051090



Long life:
30,000 burning hours



Housing:
Aluminum die cast housing



Luminosity:
Strong focused beam with 36 degree angle



Mounting:
Tiltable spot base

Colors available:





Essential SmartBright Cylinder Spot

Model Number	Wattage	Lumen	MRP (₹)
SP320P LED6S CW / NW / WW	6 W	600	1700/-
SP320P LED10S CW / NW / WW	10 W	1000	1800/-
SP320P LED15S CW / NW / WW	15 W	1500	2000/-
SP320P LED20S CW / NW / WW	20 W	2000	2000/-

HSN Code:




Long life:
25,000 burning hours



Housing:
Metal housing for better heat dissipation



Voltage protection:
160V-360V with surge protection of 2.5KV



Mounting:
Suitable for both suspended and surface option

Colors available:





Essential Smartbright Projector

Model Number	Wattage	Lumen	MRP (₹)
ST033T LED5S WW/NW/CW	7	595	3000/-
ST033T LED8S WW/NW/CW	10	850	3500/-
ST033T LED17S WW/NW/CW	20	1700	4000/-
ST033T LED25S WW/NW/CW	30	2500	5000/-
(Accessories) RCS033 1C L 1000 BK/WH (Track)	-----	-----	3000/-
(Accessories) RCS033 1C L 2000 BK/WH (Track)	-----	-----	5000/-

HSN Code: 94051090



Long life:
30,000 burning hours



Housing:
Metal heat sink for durable performance



Luminosity:
Strong focused beam with 36 degree angle



Impact resistance:
IK03

Colors available:



Strip Light





SkyCove LED Strip

Model Number:	Wattage	Lumen	MRP (₹)
LED Strip SKYCove 5M WW / NW / CW with driver	28 W	2150	1540/-

HSN Code: 94051090



Long life:
20,000 burning hours



Other features:
48 LEDs per meter & comes with a driver

Colors available:



NW



CW



WW



SkyPro LED Strip Light

Model Number:	Wattage	Lumen	MRP (₹)
Sky Pro 168 LED /Mtr NW/ WW/ CW	45 W	700/M	2150/-


HSN Code: 94051090



Long life:
20,000 burning hours



Housing:
Superior adhesive
for easy and worry-free
installation



**Shadow free
lighting:**
5 meter LED Strip
especially designed
for profile use.



Uniform brightness:
Intense lighting with
700 lumens/meter

Colors available:



Downlights






Sleek Surface

Model Number	Wattage	Lumen	MRP (₹)
SM260C LED7S-3000/4000/ 6500 PSU WH (Square)	6 W	750	1100/-
SM260C LED12S-3000/4000/6500 PSU WH (Square)	12 W	1200	1200/-
SM261C LED16S-3000/4000/6500 PSU WH (Square)	15 W	1600	1750/-
SM261C LED20S-3000/4000/6500 PSU WH (Square)	18 W	2000	1950/-
SM250C LED7S-3000/4000/ 6500 PSU WH(Circular)	6 W	750	1100/-
SM250C LED12S-3000/4000/6500 PSU WH(Circular)	12 W	1200	1200/-
SM251C LED16S-3000/4000/6500 PSU WH(Circular)	15 W	1600	1750/-
SM251C LED20S-3000/4000/6500 PSU WH (Circular)	18 W	2000	1950/-

HSN Code: 94051090

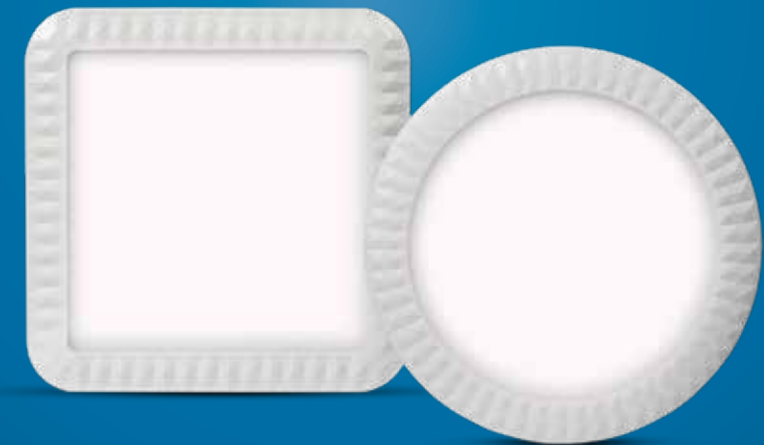

Long life:
30,000 burning hours



Mounting:
Surface/wall mounted LED downlight for multipurpose utility



Wide voltage protection:
140V-270V with surge protection of 2.5KV

Colors available:





Sleek Surface

Model Number	Wattage	Lumen	MRP (₹)
SM295C LED6S (CW/NW/WW)	6 W	700	1700
SM295C LED10S (CW/NW/WW)	9 W	1000	1800
SM296C LED12S (CW/NW/WW)	11 W	1200	2200
SM296C LED15S (CW/NW/WW)	13.5 W	1500	2300
SM296C LED20S (CW/NW/WW)	18 W	2000	2400

HSN Code: 94051090



Long life:
30,000 burning hours



Mounting:
Surface/wall mounted LED downlight for multipurpose utility



Wide voltage protection:
140V-270V with surge protection of 2.5KV

Colors available:





SkyGlow Next Gen Downlight

Model Number	Cut Out	Dimension	Wattage	Lumen	MRP (₹)
6W SkyGlow Next Gen LED DL CW/ NW/ WW	R & SQ 75 mm	108 x 108 x 21mm	6 W	600	600/-
12W SkyGlow Next Gen LED DL CW/ NW/ WW	R & SQ 110 mm	130 x 130 x 21mm	12 W	1200	845/-
15W SkyGlow Next Gen LED DL CW/ NW/ WW	R & SQ 140 mm	160 x 160 x 21mm	15 W	1500	TBD
18W SkyGlow Next Gen LED DL CW/ NW/ WW	R & SQ 140 mm	160 x 160 x 21mm	18 W	1800	1070/-

HSN Code: 94051090



Long life:
30,000 burning
hours



Wide voltage protection:
160V-360V with surge
protection of 2KV



Safety:
BIS safety standards
registered



Shapes available:
Round and Square

Colors available:





Green Perform Sleek G2

Model Number	Wattage	Lumen	MRP (₹)
DN295B LED6S-6500 PSU WH	5.5W	600	1400/-
DN295B LED8S-6500 PSU WH	7W	800	1550/-
DN295B LED10S-6500 PSU WH	9W	1000	1700/-
DN296B LED12S-6500 PSU WH	11W	1200	2100/-
DN296B LED15S-6500 PSU WH	13.5W	1500	2500/-
DN296B LED20S-6500 PSU WH	18W	2000	3000/-

HSN Code: 9405



Sleek design



Robust PDC housing



Narrow rim renders a pleasing aesthetic look

Colors available:





GreenLED Plus

Model Number	Wattage	Lumen	MRP (₹)
DN171 7.5 S LED DL G2 WW/ NW/ CW	7.5 W	750	760/-
DN172 12.5 S LED DL G2 WW/ NW/ CW	12.5 W	1250	960/-
DN172 15 S LED DL G2 WW/ NW/ CW	15 W	1500	1060/-
DN172 18S LED DL G2 WW/ NW/ CW	18 W	1800	1160/-
DN176 7.5 S LED DL G2 WW/ NW/ CW	7.5 W	750	760/-
DN177 12.5 S LED DL G2 WW/ NW/ CW	12 W	1250	960/-
DN177 15 S LED DL G2 WW/ NW/ CW	15 W	1500	1060/-
DN177 18S LED DL G2 WW/ NW/ CW	18 W	1800	1160/-

HSN Code: 94051090



Long life:
25,000 burning hrs



Housing:
Pressure die cast



Surge protection:
2.5 KV



Shapes available:
Round and Square

Colors available:



Bulkhead





VistaGlow

Model Number	Wattage	Lumen	MRP (₹)
WT140W LED7S CW/NW PSU S1 PC	140W	700	999/-

HSN Code: 94051090



Long life:
25,000 burning hours



Housing:
Pressure die cast housing



IP rating:
Dust and waterproof



Impact resistance:
IK08 (Vandal Proof)

Colors available:





VistaGlow essential Bulkhead

Model Number	Wattage	Lumen	MRP (₹)
WT 110	10W	1000	1100

HSN Code: 94051090



Long life:
20,000 burning hours



Housing:
PVC housing with unbreakable polycarbonate diffuser



Efficacy:
100 lumens/watt



IP 65 rated product



IK 08 rated product

Colors available:



Batten





SmartBrite Extra Batten

Model Number	Wattage	Lumen	MRP (₹)
BN021 LED40S 6500/ 4000 PSU GR	36 W	4000	1499/-

HSN Code: 94051090

110 Lm/w with 20000 burning hours

SmartBrite Batten

Model Number	Wattage	Lumen	MRP (₹)
BN021 LED12S 6500K/4000K PSU GR	12 W	1200	570/-
BN021 LED22S 6500K/4000K PSU GR	22 W	2200	850/-

HSN Code: 94051090



Long life:
25,000 burning hours



Housing:
Extruded aluminum housing (enhances safety) with high quality polycarbonate diffuser



Wide voltage protection:
140V-270V



Energy saving:
110 lumens/watt

Colors available:

NW

CW



StarLine Pro

Model Number	Wattage	Lumen	MRP (₹)
StarLine Pro 22 W	22 W	2200	649/-

HSN Code: 94051090



Long life:
15,000 burning hours



Wide voltage protection:
160V-360V with surge protection up to 3.5KV



Modern Design:
Low glare and No flicker




Uniform Lighting:
Comes with High Performance Diffuser



Other features:
Resistant to Yellowing and chipping

Waterproof Batten

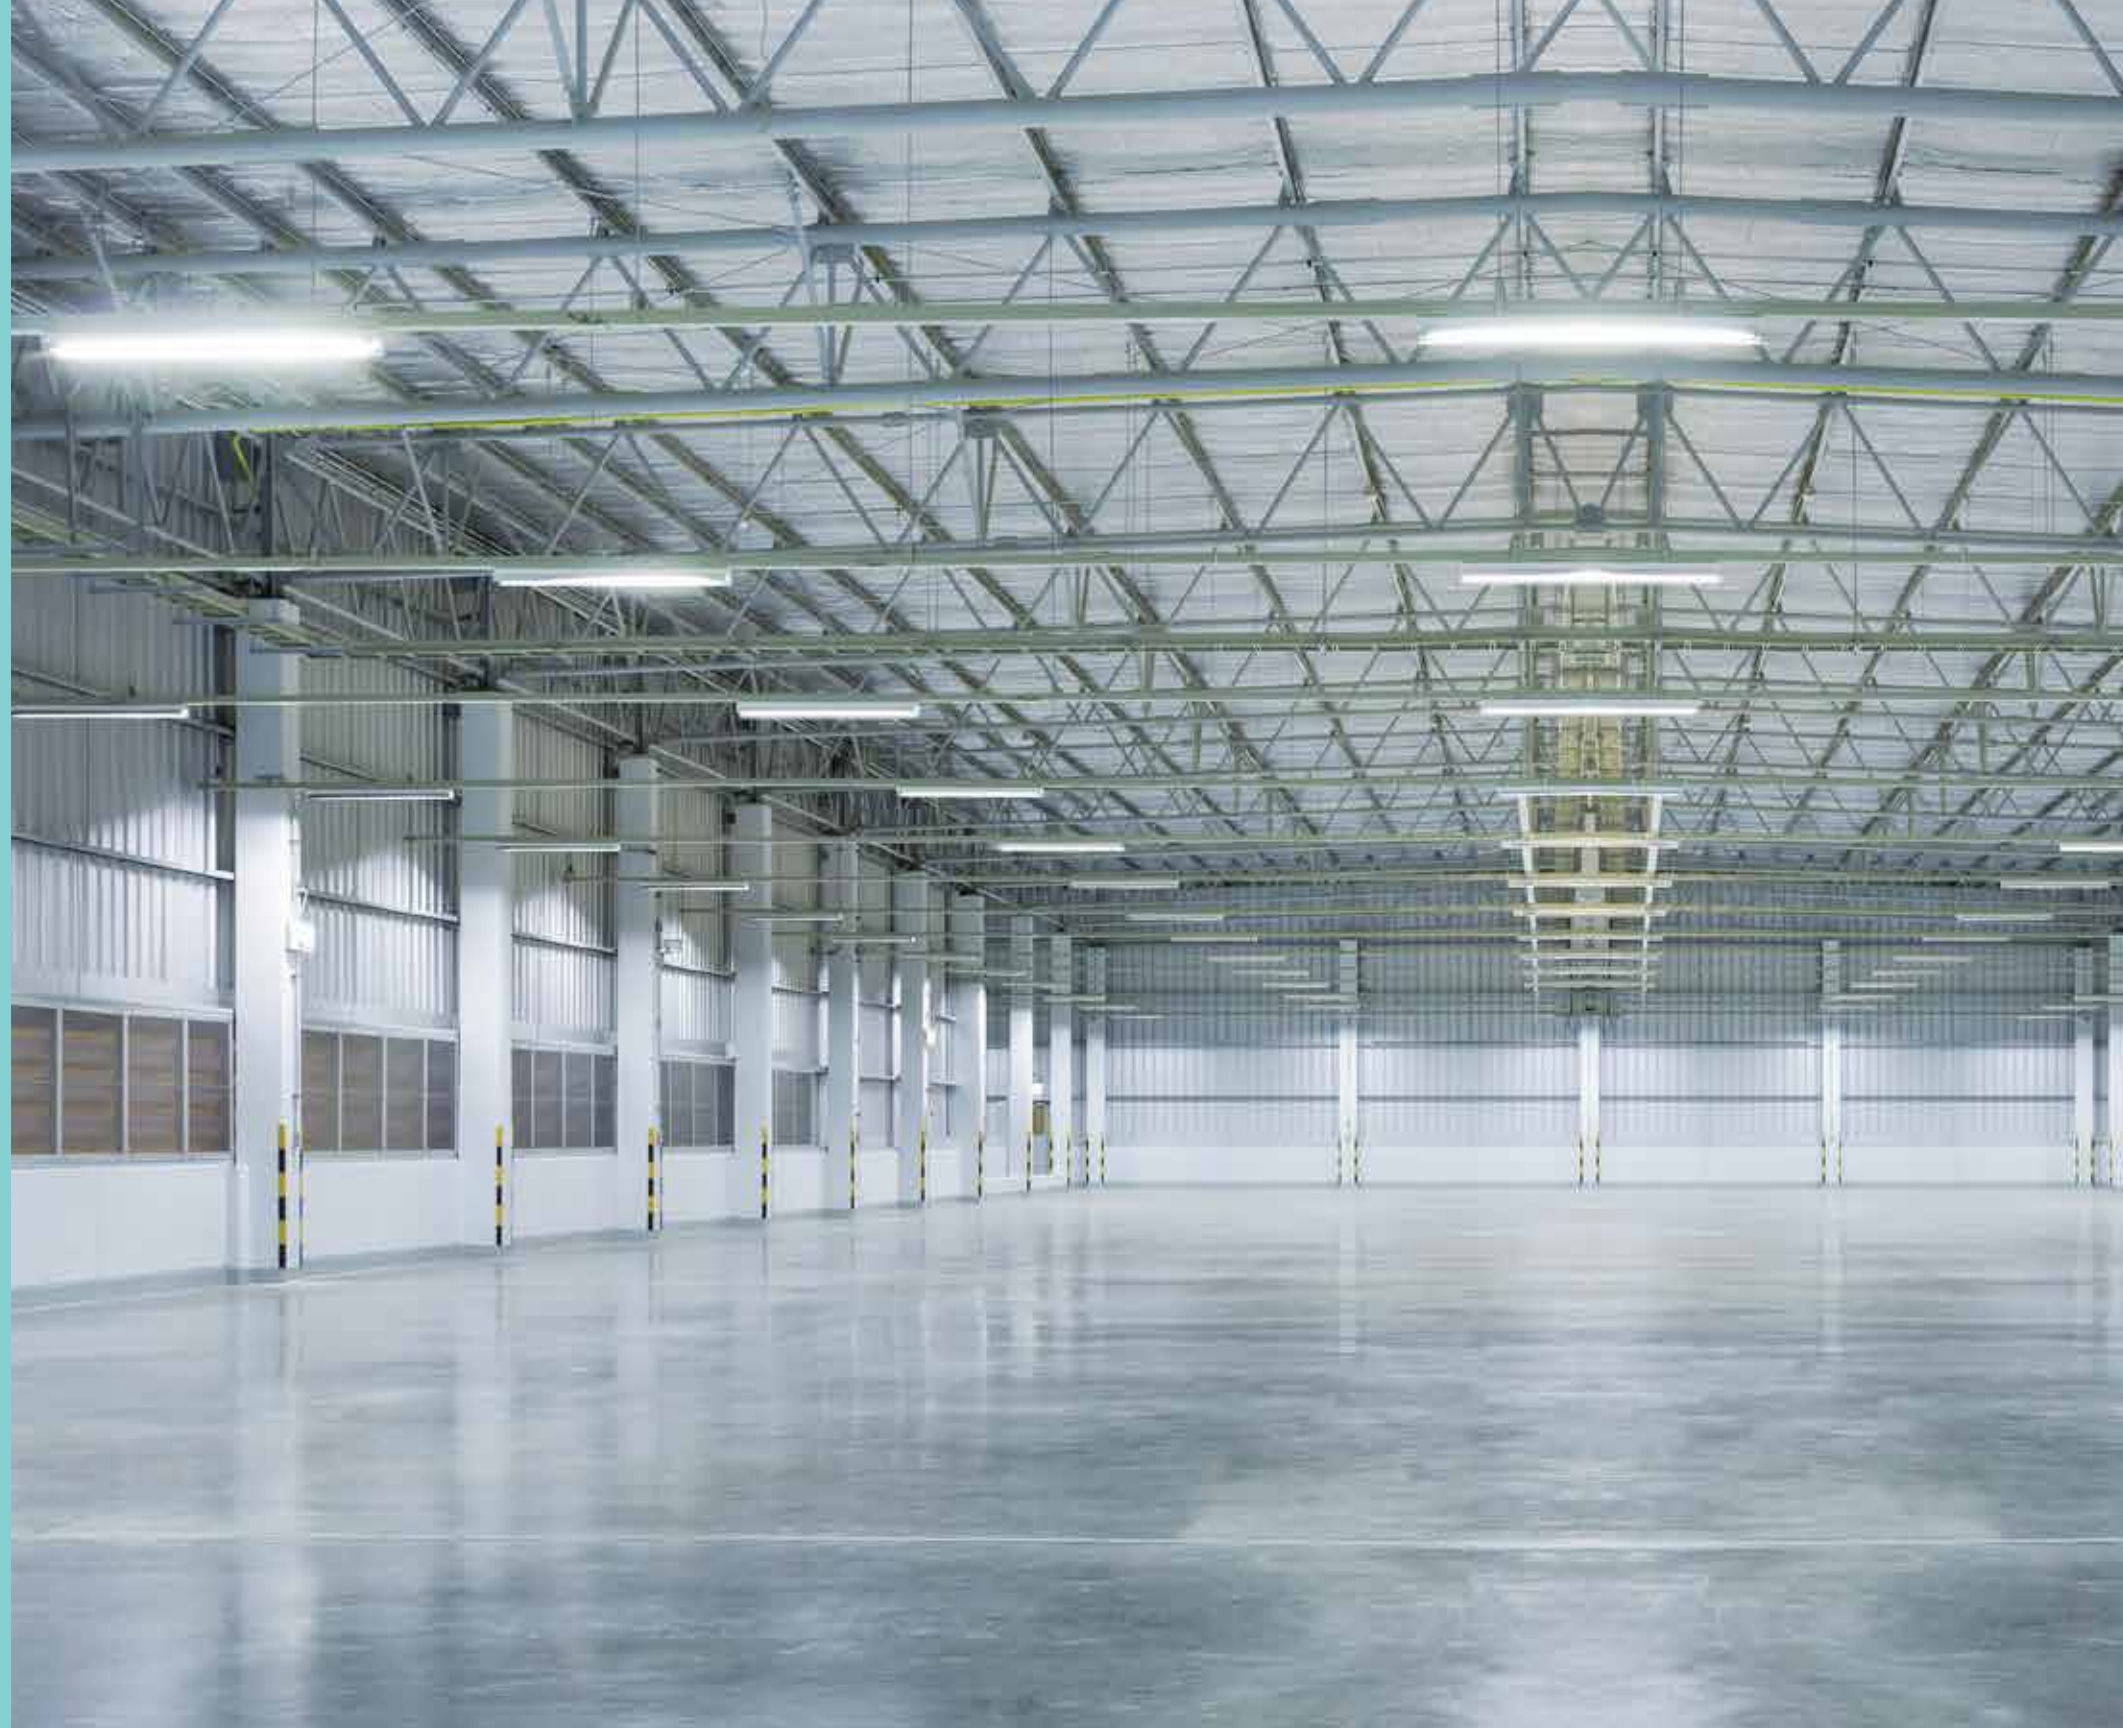



SmartBrite Waterproof

Model Number	Wattage	Lumen	MRP (₹)
WT150C LED27S	16 W	2000	2800/-
WT150C LED44S	34 W	4000	3800/-

HSN Code: 94051090



Long life:
30,000 burning hours



Housing:
Polycarbonate housing and SS hardware



Energy efficient:
>120 lumens/watt



IP rating:
Dust and waterproof LED luminaire



Mounting:
Suitable for both wall and suspended mounting with relevant mounting accessories

Colors available:



Outdoor
Professional
Trade
Luminaires



Flood





Essential SmartBright Floodlight

Model Number	Wattage	Lumen	MRP (₹)
BVP170 LED10 CW/WW 10W FG GR PSU	10 W	1000	900/-

HSN Code: 94054090



Long life:
25,000 burning hrs



Housing:
Die cast aluminum



Surge protection:
4kv



IP 65 IP 65 rated product



Efficacy:
100 lumens/watt



IK 07 IK 07 rated product

Colors available:





SmartBright Essential Floodlight

Model Number	Wattage	Lumen	MRP (₹)
BVP101 LED 20 CW / NW / WW FG GR PSU	20 W	2000	1200/-
BVP102 LED 30 CW / NW/ WW FG GR PSU	30 W	3000	2650/-

HSN Code: 94051090



Long life:
25,000 burning hrs



Housing:
Die cast aluminum



Surge protection:
4kv



IP 65 IP 65 rated product



IK07 IK 07 rated product



Class B serviceability:
Potted driver



Efficacy:
100 lumens/watt

Colors available:





SmartBright Essential Floodlight

Model Number	Wattage	Lumen	MRP (₹)
BVP173 LED55 CW/NW/WW 50W FG GR PSU	50 W	5500	5000/-
BVP174 LED77 CW/NW/WW 70W FG GR PSU	70 W	7700	7000/-

HSN Code: 94054090



Long life:
25,000 burning hrs



Housing:
Pressure die cast



Surge protection:
4kv



IP 65 rated product



IK 07 rated product



Class B serviceability:
Potted driver



Efficacy:
>=110 lumens/watt

Colors available:





SmartBright Essential Floodlight

Model Number	Wattage	Lumen	MRP (₹)
BVP175 LED110 CW/NW/WW 100W FG GR PSU	100 W	11000	9500/-
BVP176 LED165 CW/NW/WW 150W WB FG GR PSU	150 W	16500	14000/-
BVP177 LED220 CW/NW/WW 200W WB FG GR PSU	200 W	22000	18000/-

HSN Code: 94054090



Long life:
25,000 burning hrs



Housing:
Pressure die cast



Surge protection:
4 KV internal (both CM/DM modes) with inbuilt 10KV SPD



IP rating:
IP65



CRI: 70



Efficacy:
110 lumens/watt



Class B serviceability:
Potted driver



Impact resistance:
IK07

Colors available:



Street





SmartBrite Streetlight

Model Number	Wattage	Lumen	MRP (₹)
BRP040 LED 15 CW R1 S1 PSU GR	15 W	1500	1850/-

HSN Code: 94054090



Housing:
Pressure die cast housing



Surge protection:
4 KV
IP65 & IK07



Luminosity:
Finless design with better street lighting optics



Better design:
With heat sink for better heat dissipation

Colors available: CW




SmartBrite Streetlight

Model Number	Wattage	Lumen	MRP (₹)
BRP029 LED25 CW / WW MR PSU GR DX	25 W	2500	2500/-
BRP030 LED35 CW / WW MR PSU GR DX	35 W	3500	3500/-
BRP031 LED45 CW / WW MR PSU GR DX	45 W	4500	5000/-
BRP032 LED60 CW / WW SLR GR PSU	60 W	6000	6000/-
BRP032 LED70 CW / WW MR PSU GR DX	70 W	7000	7000/-
BRP 033 LED 100 CW/WW MR PSU GR DX	90 W	9000	9000/-
BRP032 LED100S CW / WW MR PSU GR DX	100 W	10000	10000/-
BRP033 LED120S CW / WW MR PSU GR DX	120 W	12000	12000/-

HSN Code: 94054090



Long life:
25,000 burning hrs



Housing:
Pressure die cast



Class B serviceability:
Potted driver



Surge protection:
Up to 4 KV
IP65 & IK07



Efficacy:
>=100 lumens/watt

Colors available:



City
beautification
range





SmartBright Essential Bollard

Model Number	Wattage	Lumen	MRP (₹)
BCP100 LED CW/NW/WW 10W PSU GR M 600mm	10W	800	8000/-
BCP100 LED CW/NW/WW 10W PSU GR L 750mm	10W	800	9000/-

HSN Code: -----



Surge protection:
100V-240V
IP65 & IK07



Weatherproof luminaire with IP65 protection



Bigger dia of 76mm insuring uniform diffused light



Long lasting, sturdy and refined finish

Colors available:





Garden Spike

Model Number	Wattage	Lumen	MRP (₹)
581952 Black Garden Spike	5 W	250	1700/-
581953 Black Garden Spike	10 W	550	2250/-

HSN Code: -----



Long life:
25,000 burning hrs



Surge protection:
Up to 2 KV
IP65 & IK07



Housing:
Pressure die cast spigot



Efficacy:
>=55 lumens/watt

Colors available:





Uniscape LED Post Top

Model Number	Wattage	Lumen	MRP (₹)
BGP200 LED26 CW/WW/NW PSU GR CPC SPD	26 W	2600	9000/-
BGP200 LED35 CW/WW/NW PSU GR CPC SPD	35 W	3500	10500/-
BGP200 LED45 CW/NW/WW PSU GR CPC SPD	45 W	4500	13000/-
BGP201 LED26 CW PSU GR CPC SPD	26 W	2600	9000/-
BGP201 LED35 CW PSU GR CPC SPD	35 W	3500	10500/-
BGP201 LED45 CW PSU GR CPC SPD	45 W	4500	13000/-

HSN Code: -----



Long life:
25,000 burning hrs



Surge protection:
Up to 4 KV
IP65 & IK07



Housing:
Pressure die cast spigot



Efficacy:
>=100 lumens/watt

Colors available:



Professional Lamps





LEDtube PC

Model Number	Wattage	Lumen	MRP (₹)
MAS LED tube 18W 2100 Lm 865 T8 (Pc)	18 W	2100	700/-

HSN Code: 85395000



Long life:
40,000 burning hours



Housing:
Polycarbonate housing with opal finish for glare-free uniform lighting



Surge protection:
3KV



Lumen efficacy:
>=116 lumen/watte



Over voltage protection:
380V withstands for 2 minutes

Colors available: **CW**



Ecofit LED Tube

Model Number	Wattage	Lumen	MRP (₹)
Ecofit LED tube 18W 2100 Lm	18 W	2100	549/-

HSN Code: 85395000



Long life:
15,000 burning hours



Housing:
Polycarbonate housing with opal finish for glare-free uniform lighting



Surge protection:
3KV



Luminosity:
Bright with Low glare

Colors available: **CW**



LEDtube Glass

Model Number	Wattage	Lumen	MRP (₹)
Essential LED tube 20W B2B 865 T8	20 W	2200	400/-

HSN Code: 85395000



Long life:
15,000 burning hrs



Housing:
Perfect replacement of
existing 1200mm T8 fluorescent
tubelight fixtures



Surge protection:
2.5KV

Colors available: **cw**



MAS LEDtube

Model Number	Wattage	Lumen	MRP (₹)
Master LEDtube	30 W	4000	1499/-

HSN Code: 85395000



Long life:
40,000 burning hrs



Surge protection:
3 KV



Thermal:
Inbuilt aluminum heat sink hence more durable

Colors available:

CW



LED Spot MR16

Model Number	Wattage	Lumen	MRP (₹)
MR16 4.5-50W 830/865	4.5 W	400	299/-

HSN Code: 85395000

LED Spot GU10

Model Number	Wattage	Lumen	MRP (₹)
4.6-50W GU10 827/830/865	4.6 W	400	399/-

HSN Code: 85395000




Beam:
36 degree

CCT:

CW

WW

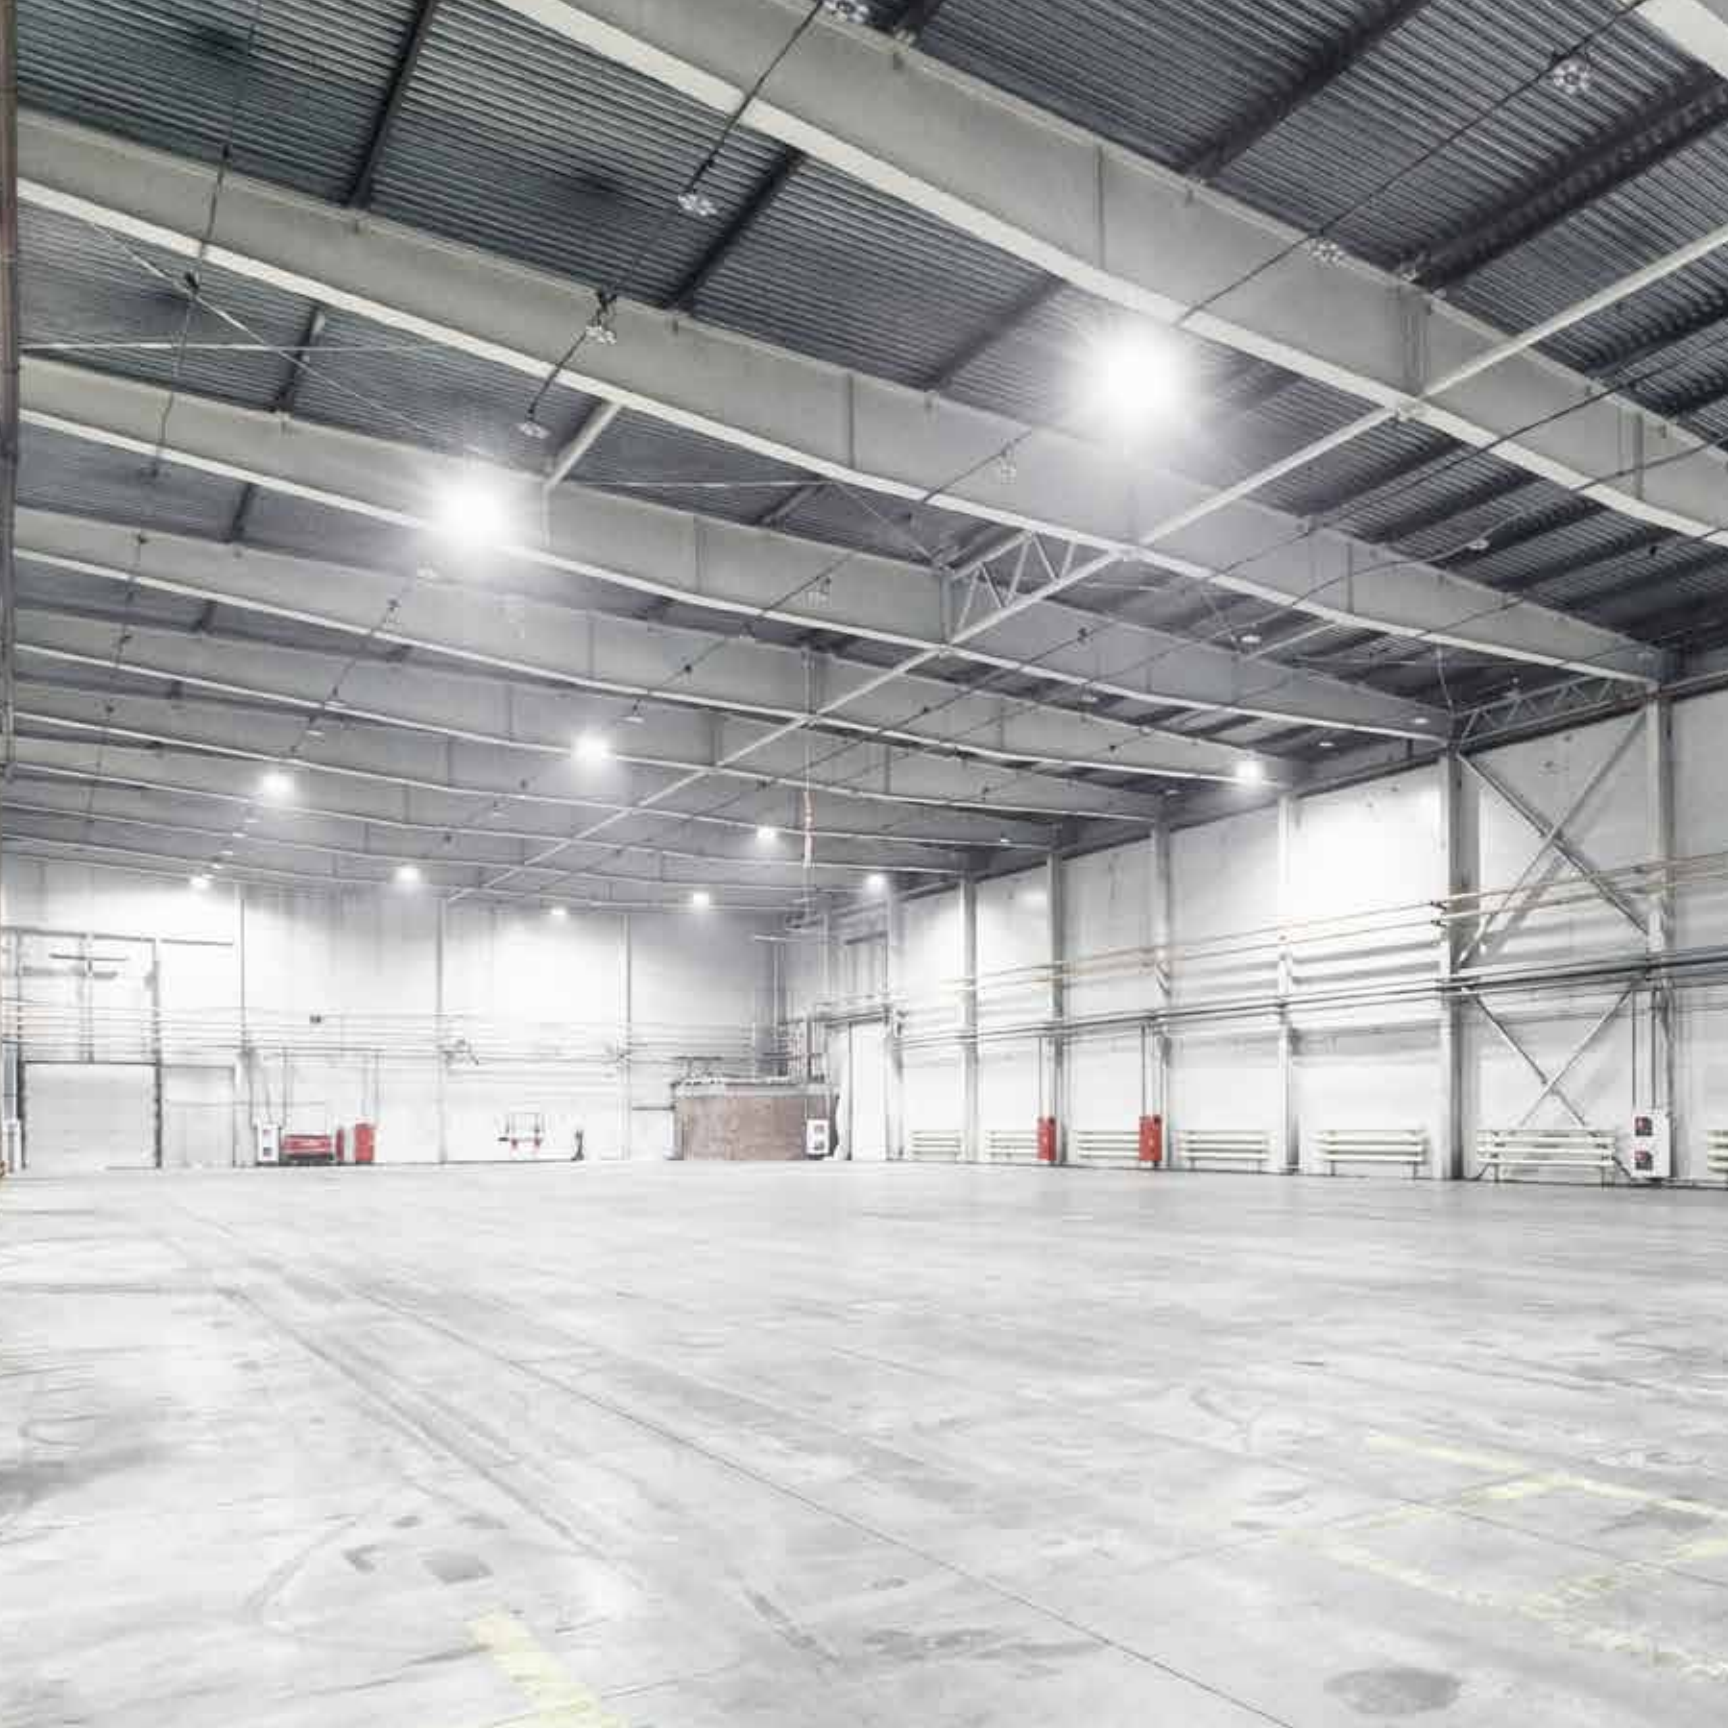

TrueForce Highbay

Model Number	Wattage	Lumen	MRP (₹)
TFORCE HB 140W E40 865/840 NB/WB GM	140	20000	9999/-

HSN Code: 85395000



Long life:
50,000 burning hours



Beam:
Wide beam and narrow beam options



Mounting:
Very high ceiling applications in industry and retail

Colors available:






A sensory experience



1 lamp, 3 scenes, countless memories



3 wattages, 1 lamp Many expressions*

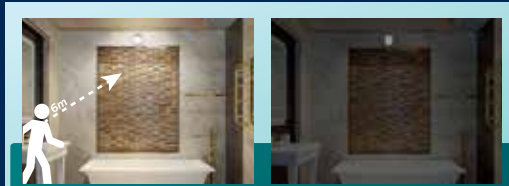

On

Lights up on sensing movement within a 6m range

Off

Switches off after 1 minute in absence of any movement

Applications:



Cool Day Light



Good for reading



15W
For reading



Natural White



For leisure time



8W
For leisure time



Warm White



For desired ambience



0.5W
As a night lamp

Value Added Lamps

Model Number	Wattage	Lumen	MRP (₹)	Color Available
LED Bulb 9W motion Sensing B22	9	900	699	CW
Stellar Bright SS B22	10	850-950	349	CW+NW+WW
Stellar Bright MW CDL B22	15/8/0.5	50-1350	449	CW

HSN Code: -----

Motion Sensing



Scene Switch



Multi Wattage



CRI >80 product



1 year warranty product

Colors available:

CW



LED PLL

Model Number	Wattage	Lumen	MRP (₹)
LED PLL 18W 6500K 2G11	18 W	1800	599/-

HSN Code: 85395000



Long life:
15,000 burning
hours



Housing:
PVC

Colors available

CW

Solar Range

Solar lighting, apart from being free and renewable, has several other benefits. Philips range of solar lighting solutions brings light to areas without access to electric grid. The sturdy and durable Philips solar lighting range not only saves energy and is environment-friendly, but also preserves the landscape as no trenching for cabling is required in them.





Essential SmartBright Solar All-in-one Streetlight

Model Number	Wattage	Lumen	MRP (₹)
BRC010 LED10S	7.5W	1000	7900/-
BRC010 LED20S	15W	2000	11000/-
BRC010 LED40S	25W	4000	12800/-

HSN Code: -----



Installer friendly

Easy to install. No trenching for cabling required



Highly efficient

High lumen efficacy of upto 160 lm/W Saves energy



Configurable

Easy configurability
Remote control for selecting lighting profile

Colors available: CW



Philips Essential SmartBright Solar Flood Light

Model Number	Wattage	Lumen	MRP (₹)
BVC080LED6	4W	600	5750/-
BVC080LED9	6W	900	7000/-
BVC080LED15	10W	1200	10500/-

HSN Code: -----



IP65 IP 65 rated product

CRI: 70

ABS Housing

Watt500 for 10 W product

Colors available: **CW**



Philips Essential SmartBright Solar Wall Light

Model Number	Wattage	Lumen	MRP (₹)
BWS010 LED50	.5W	50	1200/-
BWS010 LED100	1W	100	1950/-
BWS010 LED300	3W	300	2500/-

HSN Code: -----



IP54 IP 54 rated product

CRI: 70

ABS Body

Colors available: **CW**



Philips Essential SmartBright Solar Garden Spike Spot

Model Number	Wattage	Lumen	MRP (₹)
Garden Spike Spot	2.1W	300	3000/-
Garden Spike Spot	0.75W	100	3000/-
Round Gate Top	2.1W	300	3000/-

HSN Code: -----



Easy installation



Environment friendly



Safer than AC



Less dependence on grid

Colors available: ww



Philips Essential SmartBright Solar Bollard

Model Number	Wattage	Lumen	MRP (₹)
BGC010 LED2/730 RS	1.5W	200	4600
BGC010 LED2/730 SS	1.5W	200	4600
BGC010 LED3/730 RL	2.2W	300	5100
BGC010 LED3/730 SL	2.2W	300	5100
BGC010 LED2/730 R Spike	1.5W	300	4050
BGC010 LED2/730 S Spike	1.5W	300	4300

HSN Code: -----




Easy installation



Environment friendly



Less dependence on grid



Safer than AC



Inbuilt panel, battery, CC



300 lumen 3000k CCT

Colors available: ww



Philips Essential SmartBright Solar Indoor Suspended Lamp

Model Number	Wattage	Lumen	MRP (₹)
SP010P LED7/765 IN	6W	700	2700

HSN Code: -----



Easy installation



Environment friendly



Inbuilt panel, battery, 3000 mAh



Less dependence on grid



ABS housing



300 lumen
3000k CCT

Colors available: ww



Philips Solar Flame Light

Model Number	Wattage	Lumen	MRP (₹)
BGC010 96LED Solar Flame light	0.88	Nil	2499/-
BGC010 51LED Solar Flame light	0.5	Nil	2299/-

HSN Code: -----



Colors available: **WW** (flickering)



Easy installation



Environment friendly



Lithium battery included



Safer than AC



ABS housing



Less dependence on grid



PV panel included



Waterproof



Solar up and Down wall light

Model Number	Wattage	Lumen	MRP (₹)
BWC010 LED1/730 IN	0.75	100	1900

HSN Code: -----



Colors available: ww



Easy installation



Environment friendly



Less dependence on grid




Safer than AC



Inbuilt panel, battery, CC



100 lumen
3000k CCT



213mm



3-4 hours
back up



Solar Gate-top (Square and Round)

Model Number	Wattage	Lumen	MRP (₹)
BGC010 LED3/730 S Gate Top IN	2.1	300	4050
BGC010 LED3/730 R Gate Top IN	2.1	300	4050

HSN Code: -----



Colors available:




Easy installation



Environment friendly



Less dependence on grid




Safer than AC



Inbuilt panel, battery, CC



100 lumen
3000k CCT



213mm



Remote for dimming

Driver



Notes

Notes

